


TIK Slovakia s.r.o.


Podnikateľská 14, 040 17 Košice
tel.: +421 55 678 52 47
fax: +421 55 678 53 04
www.tikslovakia.sk



CROWN CAPS

Characteristics:

Offered crown caps are made in accordance with DIN 6099 standard. The crown caps are assigned for beverage industry for bottling glass bottles. They are suitable for bottles with short necks and long necks, conforming DIN 6094 standard requirements.

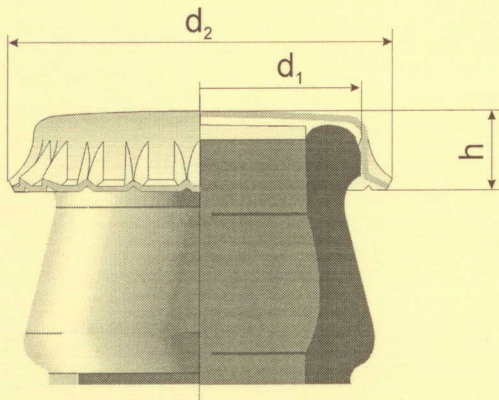

Our capabilities include printing on the crown caps using **off-set technology** including photo resolution printing. We also provide printing on internal surface of the crown caps in case of various customers contests. We can provide you with application of random generated codes under the liner by using **inject printing**.

Technical description of the crown cap:

Internal diameter (d_1):	26,75 +0,15 mm
External diameter (d_2):	32,10 ± 0,20 mm
Height (h):	6,0 ± 0,15 mm
Number of peripheral grooves:	21
Sheet metal:	electrolytic tinsplates or tin-free steel both sides coated
Thickness:	0,230 ± 5%
Coating:	material imported from ICI Packaging Coating GmbH
Printing:	material imported from ICI Packaging Coating GmbH method: off-set technique

Liner:	double ring, profile N ⁰ -916 and 923 material: PVC or PVC free granulate producer: ATF Germany, DS-Chemie Germany use: pasteurized and non-pasteurized beer, carbonated and non carbonated soft drinks, mineral waters and vegetable oils
--------	--

Packaging:

Carton boxes

- 10 000 pcs of crown caps / box
- 24 or 30 boxes on one pallette

G-boxes (metal chamber)

- 300 000 pcs / G-box

Octabins

- 250 000 pcs / octabin